


## PANDA 400

Single head sawing machine with up-feed blade and manual positioning of the vertical axis.

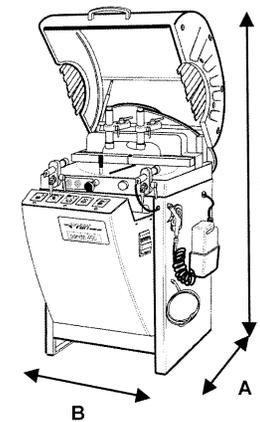

A (mm)	B (mm)	C (mm)	Kg
1000	800	1370	240

## PANDA 400

Single head sawing machine with up-feed blade and manual positioning of the vertical axis.

### Technical Specifications

Oleopneumatic saw blade advance (adjustable blade exit speed - quick return)

Blade turning 0° RH/LH

Integral guard kit around cutting area

Motor - tungsten carbide saw blade transmission by belt

Machine and turntable structure in stabilized cast iron

Turntable rotation on bearings and rollers that guarantees maximum long term precision

Working pressure: 7 bar

Saw blade motor, three phase 2.5 HP (1.84 Kw) - 2800 rpm. eurovoltage 230/400V- 50Hz; 275/480V - 60 Hz.


Spray mist blade lubrication system

Prearranged for installation of chip or smoke collectors

PANDA 400

Single head sawing machine with up-feed blade and manual positioning of the vertical axis.

Cutting diagram

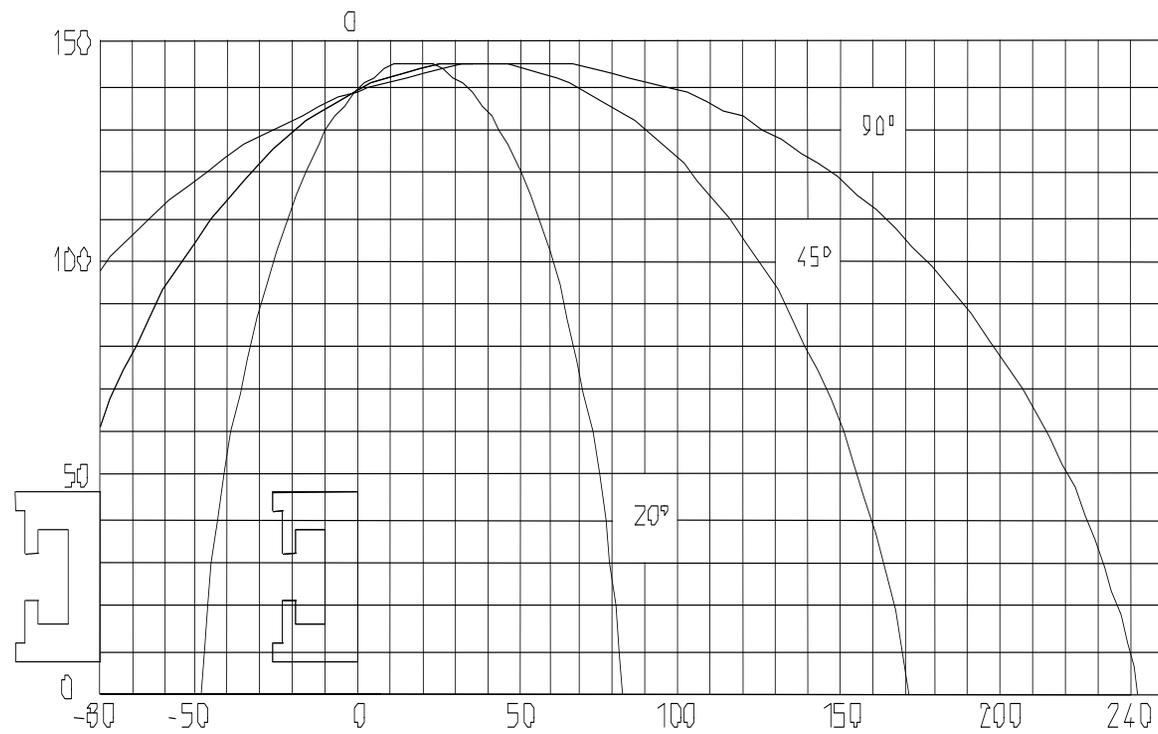

## PANDA 400

Single head sawing machine with up-feed blade and manual positioning of the vertical axis.

### Standard accessories

N	Description
1	∅ 400mm tungsten carbide saw blade
1	Integral guard kit around cutting area
2	Horizontal and vertical vices

### Optionals

#### Description

Set of camping supports (profile type to be specified)

Micro drop cutting lubrication using pure oil

Discharge roller table with length stop: manual, displayed, controlled (Carton packing included)

3 Mt. cutting length

4,2 Mt. cutting length

6 Mt. cutting length

Loading roller table with vertical roller

3 Mt. cutting length

4,2 Mt. cutting length

Additional roller for roller tables

Additional charge for special voltage and cycle (Standard motor 230/400V three-phase 50 HZ)

## PANDA 400

Single head sawing machine with up-feed blade and manual positioning of the vertical axis.


Optionals: PACKING

Description

Carton packing


Crate packing

Carton pallet packing with heat-shrink plastic bag:

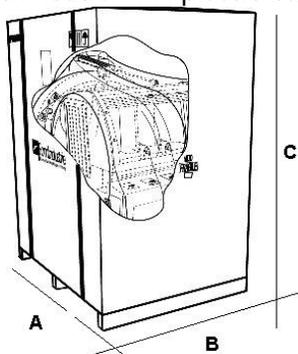

A (mm)	B (mm)	C (mm)	Kg
1100	800	1750	270

Crate packing:

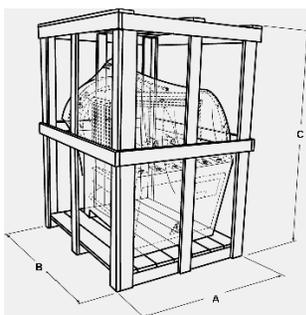

A (mm)	B (mm)	C (mm)	Kg
1200	1000	1950	285

## PANDA 400

Single head sawing machine with up-feed blade and manual positioning of the vertical axis.



The specifications and illustrations in this technical sheet are only guideline, FomIndustrie therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons at any time and without prior notification.

**Fom Industrie Srl**  
Aluminium & PVC Working Machinery

47841 Cattolica (RN)  
via Mercadante, 85  
Italia

Tel. +39.0541.832.611  
Fax. +39.0541.832.615

[www.fomindustrie.com](http://www.fomindustrie.com)  
[www.fom-group.com](http://www.fom-group.com)  
[info@fomindustrie.com](mailto:info@fomindustrie.com)