



TR 450

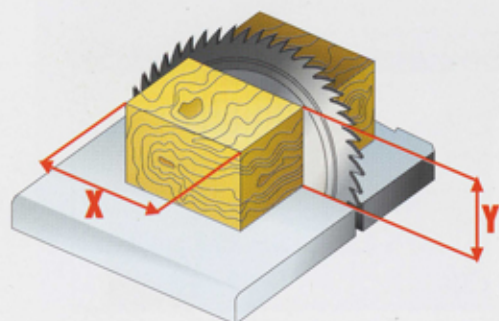

Capacità di taglio con lama ø 450 mm.
Capacité de coupe avec lame ø 450 mm.
Schnittkapazität mit Sägeblatt ø 450 mm.
Capacidad de corte con disco ø 450 mm.
Cutting capacity with sawblade ø 450 mm.

X	Y
330 mm.	25 mm.
300 mm.	50 mm.
250 mm.	95 mm.


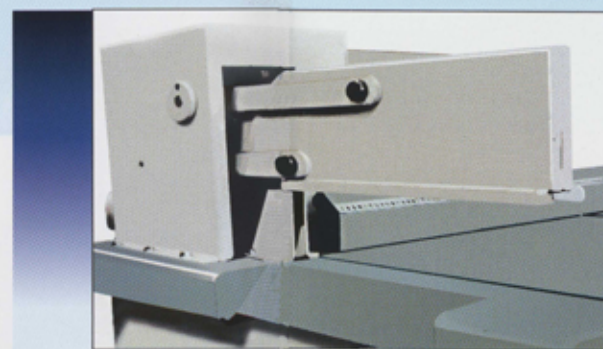


Pressore pneumatico superiore
Presseur pneumatique supérieur
Pneumatische Druckvorrichtung
Prensor neumático superior
Pneumatic workpiece clamping

Riferimenti laterali pneumatici.
Butées pneumatiques.
Pneumatische Seitenanschläge.
Topes de medida neumáticos.
Pneumatic side stops.



Riferimenti laterali manuali.
Butées manuelle.
Handbetätigte Seitenanschläge.
Topes de medida manuales.
Manual side stops.



STANDARD EQUIPMENT

Pneumatic blade feed.
Two-handed safety starting system.
CE electrical equipment.
Self-braking motor.
Working area safety grill.
Variable blade feed speed.
TCT saw blade ø 450 mm.
Working table of 1 mt. left from the blade.
Working table of 1 mt. right from the blade.

OPTIONS

Larger motor power 7,5 Hp.
Idle rollers table (Rollers ø 60 mm.).
Manual stops.
Pneumatic stops.
Electronic stops.
Electronic pushers.
Belt conveyor.
Automatic unloading systems.
Foot control.

